



# Kitchen Faucet

## DIMENSION DRAWINGS:

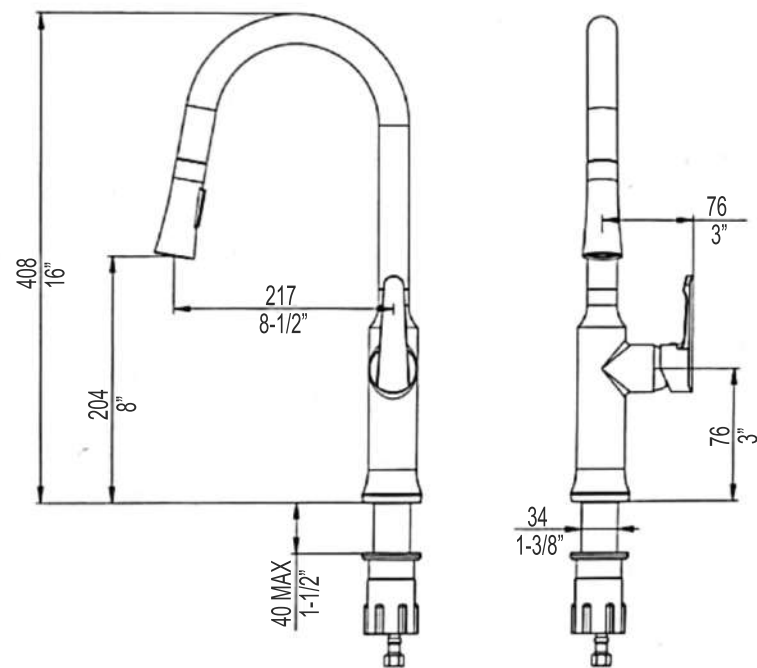


## YOU MAY NEED

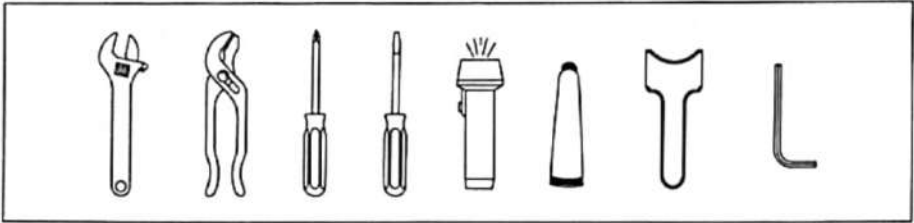

## PARTS:

| No | Component         |
|----|-------------------|
| 1  | Spout Pipe        |
| 2  | Washer            |
| 3  | Check Valve       |
| 4  | Spray Head        |
| 5  | Body              |
| 6  | Screwed Connector |
| 7  | Triangle Plank    |
| 8  | Washer            |
| 9  | Washer            |
| 10 | Lock Cpa          |
| 11 | Pilot Sleeve      |
| 12 | Hose Weight       |
| 13 | Flexible Hose     |
| 14 | Check Valve       |
| 15 | Flexible Hose     |
| 16 | Flexible Hose     |
| 17 | Handle            |
| 18 | Canopy            |
| 19 | Screw             |
| 20 | Cap               |
| 21 | Press Hat         |
| 22 | Cartridge         |
| 23 | Base              |

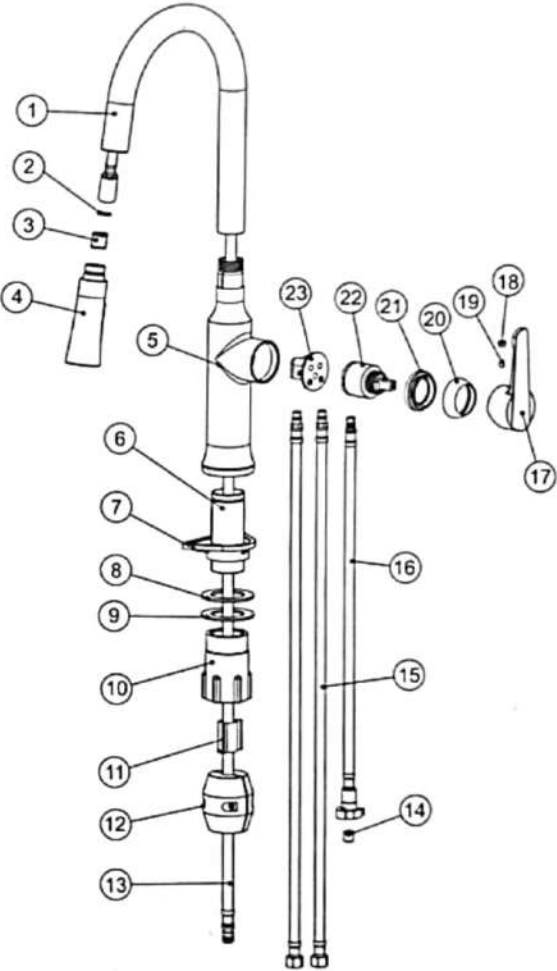


## TROUBLE-SHOOTING


If you've followed the instruction carefully and your faucet still does not work properly, take these corrective steps.

| Problem  | Cause                                      | Action  |
|--|--|---|
| Leaks underneath handle.                                 | Cartridge has come loose.                  | Tighten the cartridge.  |
| Aerator leaks or has an inconsistent water flow pattern. | Aerator is dirty or worn out or misfitted. | Unscrew the aerator to clean or replace washer, or replace the aerator.                                   |
| Water will not shut off completely.                      | Dirty or worn out washer in cartridge.     | Remove handle and cartridge to check if the washer is damaged permanently or dirty. Re-install cartridge. |


## INSTALLATION PROCEDURES

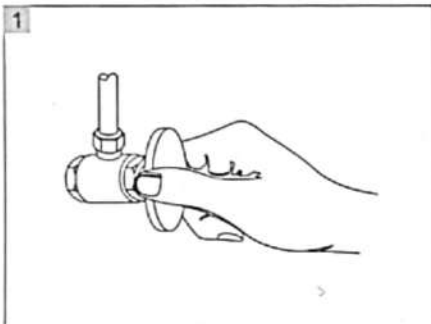


You should clean all the dirt from valve outlets. Turning off the water supply valves. This is usually found near the water meter. If you are replacing an existing faucet, remove the faucet from the sink and clean the sink surface thoroughly.

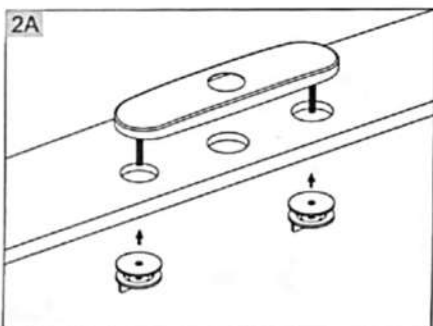


Install with Deck Plate. Place a bead of plumber's putty between faucet and sink. Place Deck Plate over the three holes of sink. From underside sink, tighten Wing nut.

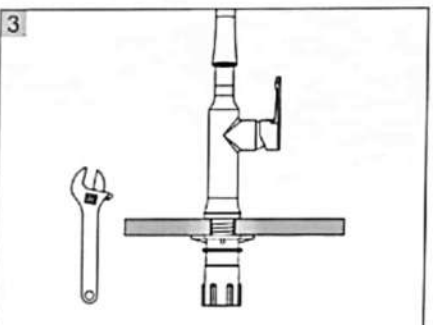


If necessary, tighten screws using an adjustable wrench until the faucet is firmly connected to the sink.

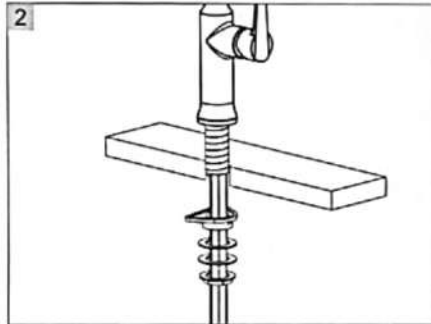

Install without Deck Plate. Make sure the O-RING is placed onto the bottom of Base Ring. Install faucet through hole in sink. From underside sink, put Plastic Washer and Mounting Nut. Position faucet on sink properly and tighten Mounting Nut.

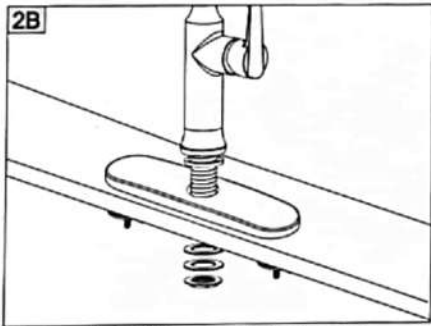


Make sure the O-RING is placed onto the bottom of Base Ring. Install faucet through Deck Plate. From underside sink, put Plastic Washer and Mounting Nut. Position faucet on sink properly and tighten Mounting Nut.

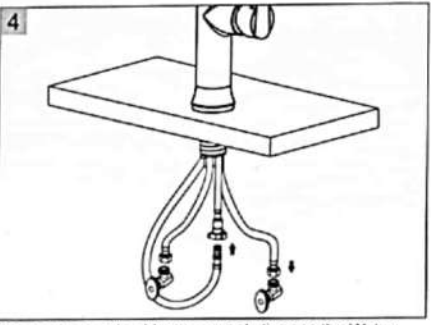


Connect hot and cold water supply lines to the Water Supply Valves.

### Warning!!!

Do not over-tighten nut during installation. Over-tighten may crack the valve and cause severe leak.

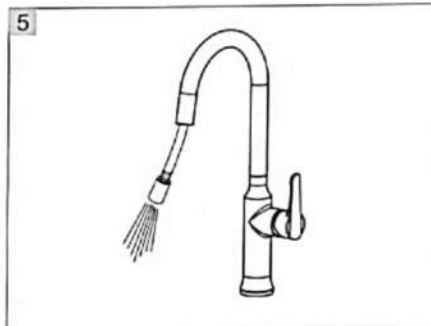


After installation is complete, remove Spray head and rotate handle to the close position. Turn Water Supply Valves on, and check all connections for leak. Flush faucet by running hot and cold water in full position for one minute.

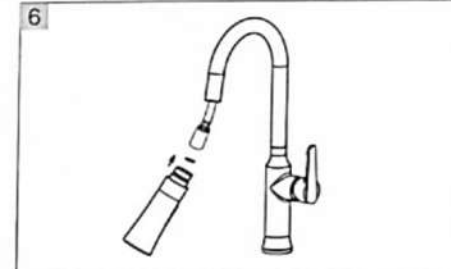


Replace Spray head.

### Warning!!!

Do not over-tighten nut during installation. Over-tighten may crack the valve and cause severe leak.

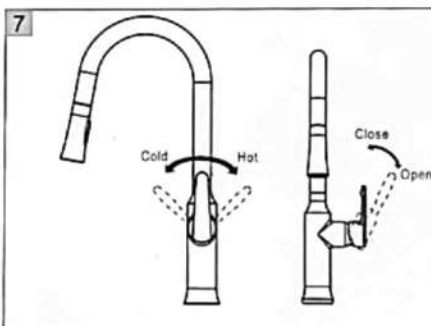


Lift the handle up, the cartridge will be activated allowing water to flow. The water flow will increase by continuing to rotate handle. By rotating the handle to the right, the water temperature will decrease to cold flow only. By rotating Handle to the left, the water temperature will increase to hot only.

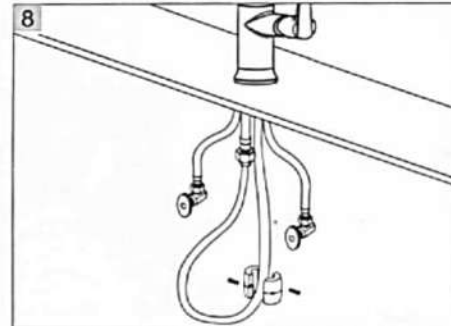


Attach Weights to the pull-out hose using screws at the proper point of the hose. Be noted Weights are optional.

## Handle Removal Maintenance

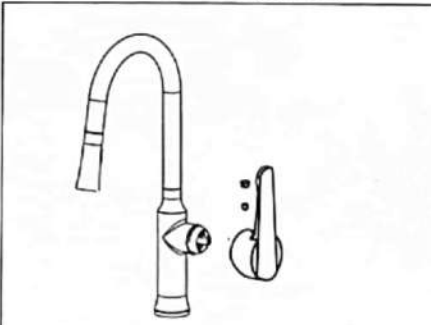

Turn off water and relieve pressure! Detach handle button using a small flathead screwdriver, unscrew set screw using Allen Wrench and take off handle.

## Valve Cartridge Removal Maintenance

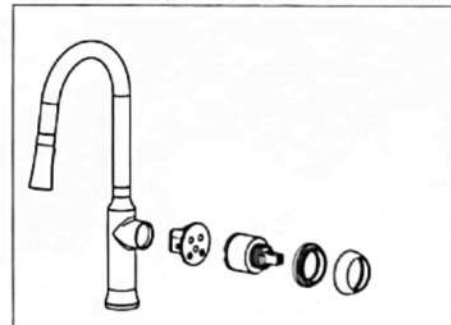

Remove handles. Unscrew Dome Cap counter clockwise by hand. Unscrew Retaining Nut using adjustable wrench, take out cartridge assembly and inspect. Replace parts as necessary. Reassemble parts by reversing steps.